


8 TON MARINATION HEAT EXCHANGER

- (1) Capacity = 8 T.R. @ 23° OF SUCTION
- (2) NH3 Charge = 60.63 lbs.
- (3) Liquid Feed = HIGH OR LOW PRESSURE
- (4) Pressure Rating = 250 PSIG @ 212°F
- (5) Shipping WT. = 400 lbs.
- (6) Operating WT. = 500 lbs.
- (7) Unit Comes Insulated From Factory

ELECTRICAL SPECIFICATIONS

120 V 1Ø 60 Hz 5 amp

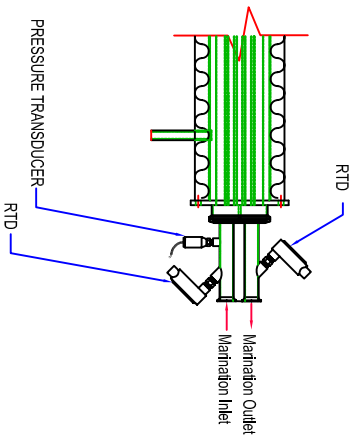

C.A.T.
REFRIGERATION

COOLING AND APPLIED TECHNOLOGY, INC.
PO Box 1279
Riverside, AR 72811 TEL: (479) 896-3433 FAX: (479) 967-2651

THIS DOCUMENT AND ITS CONTENTS ARE PROPRIETARY TO COOLING AND APPLIED TECHNOLOGY INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED EXCEPT AS AGREED TO IN WRITING BY COOLING AND APPLIED TECHNOLOGY INC.

REVISIONS			
REV	DATE	BY	DESCRIPTION
A	10-4-05	BEAM	Updated Drawing to Show Specifications

DRAWING TITLE: 8 TON MARINATION HXC			
DRAWN BY: BEAM	APPROVED BY:	CAD NO.	
DATE: 04/15/08	JOB NO.	SCALE:	